

Wheel Loader

# JINZONG 767KN

Tier 3



**JINZONG 晋工**



Wheel Loader



## Specifications

**Operating weight:** 21,000kg

Operating weight includes the work equipment stipulated by manufacturer, the unloaded attachments, driver (75kg), full-filled fuel tank, full-filled radiator, and all fluids (including the hydraulic oil, drive oil, engine oil, and engine coolant) added to the set level stipulated by manufacturer.

**Bucket capacity:** 3.5-5.5m<sup>3</sup>

### Engine

#### Description

China-III electric-control high-pressure common-rail low-rpm engine, high torque at low rpm, more powerful, lower fuel consumption and environment-friendly.

Engine has the inspection port, realizing the quick inspection and maintenance on engine.

Standard 93 dust rate, enabling the four matching parts to drop their rate of early wear by 90% or higher;

Intake heater grille effectively solve the difficulty to start up at low temperature.

Hyperboloid fan makes the heat dissipation more effective and the noise lower.

Common-rail electric-control fuel injection technologies not only increase the efficiency of the fuel consumption, also drop the engine noise and the displacement of exhaust gas.

The inter-cooler is mounted to drop the temperature of the supercharged air and thus to increase the intake efficiency. Accordingly, that drops the consumption temperature and NOx content in exhaust gas.

Emission grade	Tier 3
Manufacturer	Weichai
Model	WP10G240E341
Total power of engine (SAE J1995 / ISO 14396)	178kW(239hp) @2000rpm
Net power of engine (SAE J1349 / ISO 9249)	169kW(227hp) @2000rpm
Max. torque	980 N·m
Displacement	9.726L
Number of cylinders	6
Intake type	Turbocharger & inter-cooler

### Drive parts

#### Description

Planetary – type power-assisted transmission from Hangzhou Advance Gearbox Co., Ltd., single-stage four-element twin-turbo hydraulic torque converter features less gears, large traction force and is in good match with engine and transmission;  
Feicheng Yunyu 60 drive axle.

Power - train type	Drive axle Power gear-shifting
Torque converter	Single- stage Four elements
Max. traveling speed, forward	37 km/h
Max. traveling speed, backward	17 km/h
Gears, forward	2
Gears, backward	1

### Drive axle

Type	Feicheng Yunyu 60 drive axle
Swinging angle	±10°

### Fluid level

Fuel	290 L
Engine oil	24 L
Antifreeze	68 L
Hydraulic oil	290 L
Drive oil	54 L
Drive axle / single	51 L

### Hydraulic system

#### Description

This hydraulic system is of dual-pump confluence and steering - prevailing type, featuring the high efficiency and low fuel consumption.

Hydraulic pump is of high-pressure gear pump, featuring the excellent performance and higher reliability.

Hydraulic elements are of high standard and new process type, making its system more reliable.

Work pump type	Gear pump
System pressure	18 MPa
Lifting duration	6.5 s
Unloading duration	1.6 s
Lowering duration	3.6 s
Sum of three durations	<12 s
Control type	Pilot control

## Brake

### Description

Full-hydraulic dual-pipeline disc brake system; three pliers on one wheel; parking brake being of cable-controlled disc brake; main brake elements are exported and of high quality, making a braking safer and more reliable.

Type of service brake	Disc brake
Type of service brake	Hydraulic – pliers disc type
Type of parking brake	Clamp type brake
Type of parking brake	Cable control

## Control type

### Description

Steering system: articulated steering by steering wheel  
System supply: full-hydraulic coaxial flow-amplification steering system, flexible and easy steering and reliable performance.  
Steering cylinder: two action cylinders

Steering type	Steering wheel
Steering pressure	16 MPa
Number of cylinders	2
Diameter of cylinder bore	100 mm
Diameter of piston rod	55 mm
Travel of cylinder	324 mm
Displacement of pump	80 ml/r
Steering angle	±35°
Min. steering (outside of tire)	6,980 mm

## Cab

### Description

Instruments: all key instruments are in the middle and within the field of view of driver.

Cab: spacious, panorama, dust-free, shock-absorbing; noise-reduction; standard heater or optional A/C system. Those allow driver to work comfortable and safe;

All the covers are of electrophoretic primer processing type that could effectively protect them from being rusted;

Trim being of composite material; cab is equipped with sunvisor and wire-coiled carpet with elegant appearance.

Cab is equipped with four-point elastic suspension, absorbing shock in dual way.

The damping material is used to drop the noise, together with the carpet to relieve the reverberation in cab.

## Noise & Air conditioner

Cab noise In line with ISO 6396-2008 / EN ISO 3744-1995	83 dB(A)-- Travel mode
Cab noise In line with ISO 6396-2008 / EN ISO 3744-1995	84 dB(A)--Stationary work cycle mode
Outdoor noise In line with ISO 6395-2008	110 dB(A)--Travel mode
Outdoor noise In line with ISO 6395-2008	111 dB(A)--Stationary work cycle mode
Heating capacity of A/C	5 kW (7.8 hp)
Refrigerating capacity of A/C	4.7 kW (8 hp)

## Electronic system

### Description

GPS (Global Positioning System)

Brand-new intelligent instrument system is able to monitor the real-time work conditions of complete vehicle.

Updated smart control system with independent intellectual property has the remote diagnosis system which could provide the fast and accurate solution to customer in case of failure

Reversing alarm could make the driving safer.

Voltage	24 V
Battery	2 x 12 V
Battery capacity	2 x 120Ah
Capacity of cold startup	850 A
Reserve capacity	230 min
Grade of AC generator	1,960 W / 70 A
Output of starter motor	7.5 kW

## Performance parameters

### Description



Tilting load is calculated with standard bucket of 4 m3 and 21000kg of operation weight.

Tipping load - straight according to ISO 14397-1:2007	12,400 kg
Tilting load – full turning in line with ISO 14397-1:2007	11,000 kg
Breakout force	>200 kN
A Pivot height at max. lifting height	4,373 mm
B Unloading height	3,215 mm
C Unloading height at max. lifting height	1,165 mm
D Breakout depth	50 mm
S1 Max. bucket-withdrawing angle on the ground	45°
S2 Max. bucket-withdrawing angle at transporting position	48°
S3 Max. bucket-withdrawing angle at max. lifting height	53°
S4 Unloading angle	45°

## Dimensions

E Ground clearance	487 mm
G Wheelbase	3,470 mm
H Cab height	3,560 mm
J Wheel track	2,268 mm
K Outside width of tire	2,953 mm
L Overall length (with the attachments)	8,380 mm
M Steering angle, at any side	35°
P Departure angle	32°
R1 Min. turning radius with bucket at transporting position	7,635 mm
R2 Turning radius, at outside of tire	6,980 mm



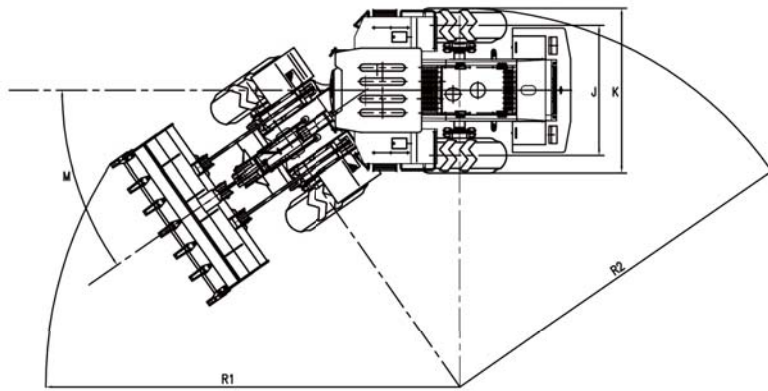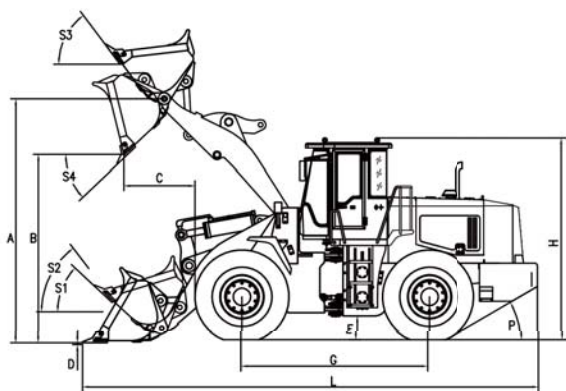

## Tire

Proper tires for your machine will become the key competitive edge of excellent performance. Through closely and jointly development and cooperation with well-known supplier which is carefully selected, Jingong could provide the full-series tires specially customized for wheeled loader.

Size	Application	Mode	Dimensions	PR/*	Tube type	Width	Overall diameter	Depth of tread	Loading capacity, 50km/h/10km/h
L2	<ul style="list-style-type: none"> <li>At site with good traction</li> <li>For example, on slope with smooth gradeability</li> <li>Work at soft and muddy site without sharp rocks.</li> <li>In all loading/transporting conditions.</li> </ul>		26.5-25	16	TL	675mm	1,750mm	29.5mm	7,300/11,500kg
			26.5-25	20	TL	675mm	1,750mm	29.5mm	8,250/9,500kg
L3	<ul style="list-style-type: none"> <li>Work in sandy conditions</li> <li>In all types of loading/carrying operations</li> <li>Unlike L2, L3 tread is narrow and less self-cleaning effect.</li> </ul>		26.5-25	24	TL	675mm	1,750mm	35mm	9,050/14,000kg
			26.5-25	28	TL	675mm	1,750mm	35mm	10,000/15,500kg
			26.5-25	32	TL	675mm	1,750mm	35mm	11,200/17,000kg
			26.5R25	*	TL	675mm	1,750mm	36mm	9,000/15,000kg
			26.5R25	**	TL	675mm	1,750mm	36mm	11,500/18,500kg

Note: radial tire has its load-bearing capacity represented with stars \*. The more stars means the radial tire has more load-bearing capacity. The special radial tire dimensions listed in table 2 starts (\*\*) means the max. load-bearing capacity of radial tire.

## Parameters of work equipments

Item	Rock bucket	General bucket	Coal bucket	High-position unloading			Unit
				Regular bucket	Coal bucket	Enlarged bucket	
Bucket capacity	3.3	4	4.5	3.5	4.5	5.5	m <sup>3</sup>
Rated load	6000	6000	6000	5500	5500	5500	kg
Complete vehicle weight	21100	21200	21220	21600	21820	21920	kg
Unloading height	3250	3135	3115	3565	3485	3450	mm
Unloading distance	1150	1180	1205	1450	1575	1610	mm
Overall length	8254	8520	8520	8816	8953	9150	mm
Min. steering radius (edge of bucket)	7540	7825	7825	8035	8130	8250	mm

The product structures and parameters may alter with the technology updating, without any notice in advance. If sample differs from the actual product, the latter prevails.

# Standard configurations

## Engine

Weichai WP10, Tier 3  
Engine output power 178KW (239 hp),  
air-to-air cooling, six cylinders and four  
strokes  
Pre-filtration of oil-water separator  
Fuel filter  
Direct-drive fan

## Drive

Planetary – type power-assisted transmission  
from Hangzhou Advance Gearbox Co., Ltd.  
Startup function, forward four gears, neutral  
gear and backward two gear  
Transmission oil level detector  
Secondary oil filter, oil bar  
Remote pressure switch for diagnosis

## Drive axle

Feicheng Yunyu 60 drive axle  
Hydraulic – pliers disc type break  
Auxiliary parking brake

## Hydraulic system

Pilot control  
Dual-pump confluence hydraulic system

## Steering system

Full-hydraulic coaxial flow-amplification  
steering system and steering – prevailing

## Tire

26.5-25 / L3 diagonal tire  
Regular mudguard

## Frame assembly

Spacious central articulation arrangement  
with conic bearing  
Articulated locking lever  
Draw bar

## Electrical system

Two headlamps, low beam/ high beam  
On the top of cab, there are two headlamps  
Battery, maintenance-free  
24 V power socket  
Electric horn  
Wiper of windshield  
Radio / player with USB port  
Reversing warning lamp

## Instrument

Engine coolant temperature  
Transmission oil temperature  
Fuel level meter  
Timer  
Voltage  
Brake pressure  
Charging of battery  
Steering lamp  
Transmission oil pressure alarm  
High-beam indicator

## Cab

Seat  
Dual-direction adjustable steering column  
Large- arc window  
Rubber cushion  
Two sides of rearview mirror  
Heater  
One cup holder  
Sunvisor

## Others

On-board tools and attachments

# Optional configurations

## Engine

Cold startup device  
Oil-bathed dual-layer air filter

## Hydraulic system

Flexible shaft operation

## Axles and tires

Check the front tire specifications  
Tire protective chains

## Cab

Luxury seat

## Others

Automatic central lubrication  
Automatic weighing device  
Sub blade

# WIN WITH RELIABILITY



子江集团 • 福建晋工机械有限公司  
Fujian Jingong Machinery Co., Ltd.

地址: 中国福建省晋江市安海前埔工业区

ADD: Anhai Qianpu Industrial Zone, Jinjiang City Fujian Province China

服务电话/Service Phone: 400-0922-789

邮编/Postcode: 362261

网址/Website: <http://www.china-jingong.com>

邮箱/E-mail: [jingong@china-jingong.com](mailto:jingong@china-jingong.com)

The contents and specifications of this brochure are subject to change without prior notice.

The pictures in this brochure may differ from the actual machines sold.